

THE POSSIBILITIES ARE INFINITE



Fujitsu recommends Windows Vista® Business.

LifeBook E8420

top-of-the-line performer
state-of-the-art technology



LifeBook E8420



LIFEBOOK | Built-In Confidence

Absolute performance is at your disposal with the latest Intel® Centrino® 2 Processor Technology. The corporate warrior's first choice in weaponry, the LifeBook E8420 grants you the power to perform with advanced features and enhanced security. This brilliant 15.4-inch SuperFine Wide XGA screen displays crystal clear images with astounding detail. Supported by NVIDIA GeForce 9300M GS with a maximum of 4GB memory, the LifeBook E8420 means serious business.



Performance on Command for Corporate Warriors



High Performance
For High Achievers

Power your business with the advanced Intel® Centrino® 2 Processor Technology at full speed ahead. Featuring the Intel® PM45 Express Chipset and Intel® WiFi Link 5300AGN (3x3) network connection, get power and speed on demand, see greater productivity and improved support for network areas plus protect it by actively blocking incoming threats.



Maximum Security



A bristling arsenal of security features work for your peace of mind with Fujitsu 3D Shock sensor, BIOS Lock, 2-password Hard Disk Lock, LifeBook Lock, Trusted Platform Module option and Anti-theft Lock Slot. With the LifeBook E8420, professionals can rest assured that their confidential data stays confidential, and away from prying eyes. To top it off, access to encrypted data will only be authorised with a match to a pre-registered fingerprint.

THE POSSIBILITIES ARE INFINITE

FUJITSU

Fujitsu recommends Windows Vista® Business.

- 15.4-inch wide top-of-the-line performance LifeBook with Intel® Centrino® 2 Processor Technology at approximately 2.5kg*
- Genuine Windows Vista® Business
- Instant converged communications using built-in 1.3 Mega Pixel camera and dual built-in stereo microphones
- Superior security features for enhanced data and hardware protection
- Superb 2D/3D graphics performance with NVIDIA GeForce 9300M GS graphics and HDMI output
- Health and environment friendliness with RoHS compliance¹⁰

* with weight saver option

| Specifications |
|---|
| Intel® Centrino® 2 Processor Technology |
| - Intel® Core™2 Duo Processor T9400 ² (2.53GHz, 6MB L2 cache, 1066MHz)/ P8600 ² (2.40GHz, 3MB L2 cache, 1066MHz) |
| - Intel® PM45 Express Chipset |
| - Intel® WiFi Link 5300AGN (3x3) network connection |
| Genuine Windows Vista® Business (or Genuine Windows Vista® Home Premium) |
| 15.4-inch SuperFine WXGA TFT ¹⁷ 300nits, 1280 x 800 pixels/ 15.4-inch WSXGA+ TFT ¹⁷ 180nits, 1680 x 1050 pixels |
| Dual Layer Super Multi Writer ⁹ / CD-RW Combo Drive |
| 2GB DDR3 1066MHz/ 1GB DDR3 1066MHz |
| Max. Memory Supported ⁴ - 4GB DDR3 1066MHz, Dual Channel |
| 320GB/ 250GB/ 160GB |
| Up to 3.5hrs ¹ (8-cell Li-Ion 5200mAh) |
| Approx. 2.5kg (w/ weight saver option) |
| Detailed Specifications |
| SATA-150 5400rpm, S.M.A.R.T support, Two Partitions - 50/50 ¹³ , protected by Fujitsu 3D Shock Sensor ¹⁵ |
| NVIDIA GeForce 9300M GS with Total Available Graphics Memory ⁶ of 1023MB/511MB |
| RealTek ALC269 HD audio codec with dual built-in stereo speakers |
| HD Audio-in: External Mic-in, Dual Built-in Stereo Microphones |
| HD Audio-out: Headphone-out |
| 1.3 Mega Pixel camera, Bluetooth® v2.1+EDR, Infrared IrDA 1.1 4Mbps ³ , 56k V.92 ² Global Modem MDC1.5, Intel® 82567LM/LF 1000/100/10Mbps ⁴ |
| Gigabit Ethernet PCI Express® x 1 and Intel® WiFi Link 5300AGN (3x3) network connection with three antenna. |
| Separate ON/OFF switch for wireless network connection |
| Spill-resistant Keyboard ¹² : 84-key, 19mm key pitch, 2.7mm key stroke, Quick Point |
| Intelligent Touch Pad with configurable vertical and horizontal scroll functions |
| Fingerprint Sensor with vertical scroll functions |
| PC Card Type II, ExpressCard™ /34 /54 support, Smartcard ⁷ , Secured Digital/ Memory Stick®/ Memory Stick® PRO |
| USB 2.0 x 4, VGA (external display), RJ45 (LAN), RJ11 (modem), IEEE1394, HDMI, HD Audio-in, HD Audio-out, Serial, Parallel, Power Adapter DC-in, Port Replicator Interface |
| Four Programmable Application Launch Buttons (Internet, Email and two other softwares) |
| BIOS Lock, 2-password Hard Disk Lock, LifeBook Lock, Anti-theft Lock Slot, Smartcard ⁷ Slot, Fingerprint Sensor, Trusted Platform Module (TPM v1.2) option |
| 357mm (W) x 257mm (D) x 33.3/ 34.5mm (H) |
| Bundled Accessories |
| Input AC 100-240V, Output DC 19V 100W |
| Softex Omnipass, CyberLink PowerDVD™, CyberLink PowerDirector™, Roxio Easy Media Creator, Adobe Acrobat Reader, Fujitsu UpdateNavi ¹⁶ , Fujitsu 3D Shock Sensor Utility, Fujitsu Power Saving Utility, Fujitsu Hardware Diagnostic Tool, Fujitsu Display Manager, Sun Microsystems Java Runtime, Camera Capture Application, Microsoft Office Professional 2007 60-day Convertible Trial ¹⁸ |
| 1 year Full Licensed Norman Virus Control with Sandbox Technology and Norman Personal Firewall, Acronis True Image |
| Optional Accessories |
| Connector Interface: USB 2.0 x 4, Headphone-out, Microphone-in, DVI-D, VGA (external display), RJ45 (LAN), PS/2 (keyboard/mouse), Serial, Parallel, Power Adapter DC-in |
| Replaceable with - Bay Battery, 6-cell Li-Ion 3800mAh, up to 5.5hrs ¹ battery life (Standard + Bay Batteries) |
| - Dual Layer DVD Super Multi Writer ⁹ |
| - 2" HDD Fitting Kit (w/o SATA HDD) ¹¹ |
| - DVD/CD-RW Combo Drive |
| - Weight Saver |
| External USB 1.44MB FDD |
| USB Optical Scroll Mouse |

The above information shows the general technical specifications of the product and does not represent actual configuration. For specific configurations and their availability, please check with your local distributors.

Disclaimers:

- Results obtained from BAPCO's MobileMark® 2007 (Productivity Workload) performed on systems with maximum battery life settings under laboratory testing environment. Actual battery life will vary based on screen brightness, sound volume settings, running applications, connected peripherals, power management settings, battery conditioning, and other customer preferences in the real life situation. Built-in bay device or hard drive usage may also have a significant impact on battery life. Note: Battery life is based on Intel® Core™2 Processor T9400.
- Maximum 56Kbps performance varies according to your local service providers' services as well as line condition. V.92 performance is dependent on local service providers' services.
- This term does not represent actual data rate of 4Mbps and simply indicates compliance with IrDA standard specification 1.1. Actual maximum data rate depends on local configurations and connected devices.
- This term does not represent actual data rate of 1000/100/10Mbps and simply indicates compliance with IEEE 802.3, IEEE 802.3u and IEEE 802.3ab standards. Actual maximum data rate depends on network configurations, cable conditions as well as connected devices.
- Please check actual bundling with country local distributor. T9400 refers to (2.53GHz, 6MB L2 cache, 1066MHz FSB), P8600 refers to (2.4GHz, 3MB L2 cache, 1066MHz FSB).
- 1023MB Total Available Graphics Memory is available on 2GB system memory. It refers to a total of 256MB dedicated video memory and 767MB shared system memory: 511MB Total Available Graphics Memory is available on 1GB system memory. It refers to a total of 256MB dedicated video memory and 255MB shared system memory. The memory size available to the Operating System will be less than the total size of the installed memory modules.
- Fujitsu does not provide the application for Smartcard solution.
- BIOS Lock needs a supervisor/user password to access BIOS setup. BIOS settings can be configured to prompt for password at every first bootup or all bootup sequences. Access to BIOS setup is needed to configure Hard Disk Lock. Hard Disk Lock requires an access key to retrieve data on the hard disk. This is a Data Confidentiality security feature. LifeBook Lock requires a supervisor/user password to bootup the LifeBook when it powers up or resumes last session from suspend/hibernate mode. This is an anti-theft feature with more than 800,000 password combinations using the buttons on the Quick Launch Panel. Anti-theft Lock Slot allows the use of a lock to physically secure the LifeBook. Smartcard slot usage is dependent on customer's solution. Fingerprint sensor uses AuthenTec TruePrint™ Technology and Softex OmniPass to remember customer list of user IDs and passwords. Full security unlock sequence - LifeBook Lock, Bootup Lock (BIOS Lock), Hard Disk Lock, Fingerprint Windows Logon.
NOTE: Loss of password requires the LifeBook to be returned to Japan factory for system refresh. Cost of shipment and lost data will be borne by the customer. Backup your user's profile before changing HDD. Without the user's profile associated with a document at the point of encryption, Softex OmniPass cannot decrypt the encrypted document. 2 passwords refers to Master Password and User Password of the HDD Lock. The Master Password can be used to clear the User Password at the BIOS settings under Hard Disk Security. If HDD Lock prompt is enabled, only the User Password can be used to boot up the unit. Loss of these 2 passwords means the HDD content cannot be retrieved. It is the customer's responsibility to ensure the safe keeping of these 2 passwords for retrieval of data from the locked HDD.
- Supports DVD multi formats such as DVD-RAM, DL DVD±R, DVD±RW, DVD±R, CD-RW, DVD-ROM, CD-R and CD-ROM.
- RoHS (Restriction on Hazardous Substances) compliance means the system and its internal components comply with the EU RoHS directive (2002/95/EC) on the restricted use of six hazardous substances in the manufacture of the system and its internal components.
- Only the HDD Housing Kit and screws are provided. HDD is to be purchased separately.
- Spill-resistant Keyboard does not imply the system is water-proof. If liquid is spilled onto the keyboard, power off the system immediately and turn the notebook upside down to drain off the liquid.
- This refers to Windows Vista® hard disk drives C:\ and D:\. 50/50 refer to approximate 50% allocation of user accessible hard disk storage to C:\ and D:\ drives.
- 4GB DDR3 1066MHz maximum memory is supported when Fujitsu recommended 2GB DDR3 1066MHz memory module is made available.
- Fujitsu 3D Shock Sensor of a powered-up unit retracts hard disk read-write head to a secured zone upon detection of excessive vibrations or shocks. This greatly reduces the possibility of damage to the hard disk and its content - example in the event of a sudden drop or impact. The sensor monitors movement from three axes and its sensitivity can be adjusted by user to accommodate different working environments using the Fujitsu 3D Shock Sensor Utility.
- UpdateNavi is a Fujitsu Proprietary application that updates LifeBook drivers by connecting automatically to Fujitsu's server. This will help update your LifeBook with the latest software drivers and utilities to ensure compatibility between hardware and software, maintaining smooth operation anytime, anywhere.
- It is natural for all thin-film transistor (TFT) liquid crystal displays (LCD) to show a small number of missing or discolored dots. These are commonly known as non-conforming pixels. This is a technology limitation of TFT LCD and does not represent a defect. Fujitsu warranty does not cover limitations in technology such as non-conforming pixels.
- Microsoft Office Professional 2007 60-day Convertible Trial needs online activation to begin. 60-day starts from day of activation.

*PCI Express® and the PCI Express design marks are registered trademarks and/or service marks of PCI-SIG.
Dolby and the double-D symbol are registered trademarks of Dolby Laboratories.

Specifications reflected above are engineering and hardware specifications. They do not represent actual usage or operating dimensions, sizes, performances and weights as these are dependent on factors such as operating temperature, type of operating system and application used, connected devices and accessories as well as hardware configurations of the notebook. Please check the compatibility of 3rd party accessories before purchase. Ambient temperature: 5° to 35°C / 41 to 95°F (operating), -15° to 60°C / 5 to 140°F (non-operating). Relative humidity: 20% to 85% RH (operating), 8% to 85% RH (non-operating)

LifeBook E8420

Fujitsu recommends Windows Vista® Business.



LifeBook E8420



Total Converged Communication

Be anywhere and everywhere but still keep in touch with associates, do away with business down-time or delays with the LifeBook E8420. A comprehensive suite of communication tools including a 1.3 Mega Pixel camera, dual built-in stereo microphones and wireless antennas makes staying in touch and in control a breeze.



Brilliant Visual Performance

The LifeBook E8420 offers PureVideo HD technology for outstanding visual brilliance and clarity, taking gaming and movie entertainment to unparalleled levels. Incorporated with NVIDIA PowerMizer technology which intelligently balances power output to enhance battery life thus ensuring the enjoyment last longer.



LifeBook E8420

- 15.4-inch wide top-of-the-line performance LifeBook with Intel® Centrino® 2 Processor Technology at approximately 2.5kg*
- Genuine Windows Vista® Business
- Instant converged communications using built-in 1.3 Mega Pixel camera and dual built-in stereo microphones
- Superior security features for enhanced data and hardware protection
- Superb 2D/3D graphics performance with NVIDIA GeForce 9300M GS graphics and HDMI output
- Health and environment friendliness with RoHS compliance¹⁰

| Specifications | |
|----------------------------|---|
| Platform | Intel® Centrino® 2 Processor Technology - Intel® Core™2 Duo Processor T9400* (2.53GHz, 6MB L2 cache, 1066MHz)/ P8600* (2.40GHz, 3MB L2 cache, 1066MHz) - Intel® PM45 Express Chipset - Intel® WiFi Link 5300AGN (3x3) network connection |
| Operating System | Genuine Windows Vista® Business (or Genuine Windows Vista® Home Premium) |
| Display | 15.4-inch SuperFine WXGA TFT ¹⁷ 300nits, 1280 x 800 pixels/ 15.4-inch WSXGA+ TFT ¹⁷ 180nits, 1680 x 1050 pixels |
| Modular Bay Device | Dual Layer Super Multi Writer ⁷ / CD-RW Combo Drive |
| Memory | 2GB DDR3 1066MHz/ 1GB DDR3 1066MHz Max. Memory Supported ¹⁴ - 4GB DDR3 1066MHz, Dual Channel |
| Hard Disk | 320GB/ 250GB/ 160GB |
| Battery | Up to 3.5hrs ¹ (8-cell Li-Ion 5200mAh) |
| Weight | Approx. 2.5kg (w/ weight saver option) |
| Detailed Specifications | |
| Hard Disk Drive | SATA-150 5400rpm, S.M.A.R.T support, Two Partitions - 50/50 ¹¹ , protected by Fujitsu 3D Shock Sensor ¹⁵ |
| Graphics | NVIDIA GeForce 9300M GS with Total Available Graphics Memory ⁶ of 1023MB/511MB |
| High Definition (HD) Audio | RealTek ALC269 HD audio codec with dual built-in stereo speakers HD Audio-in: External Mic-in, Dual Built-in Stereo Microphones HD Audio-out: Headphone-out |
| Communication | 1.3 Mega Pixel camera, Bluetooth® v2.1+EDR, Infrared IrDA 1.1 4Mbps ¹ , 56k V.92 ² Global Modem MDC1.5, Intel® 82567LM/LF 1000/100/10Mbps ¹ Gigabit Ethernet PCI Express® x 1 and Intel® WiFi Link 5300AGN (3x3) network connection with three antenna. Separate ON/OFF switch for wireless network connection |
| User Interface | Spill-resistant Keyboard ¹² , 84-key, 19mm key pitch, 2.7mm key stroke, Quick Point Intelligent Touch Pad with configurable vertical and horizontal scroll functions Fingerprint Sensor with vertical scroll functions |
| Card Slots | PC Card Type II, ExpressCard™ /34 /54 support, Smartcard ¹ , Secured Digital/ Memory Stick®/ Memory Stick® PRO |
| Connector Interface | USB 2.0 x 4, VGA (external display), RJ45 (LAN), RJ11 (modem), IEEE1394, HDMI, HD Audio-in, HD Audio-out, Serial, Parallel, Power Adapter DC-in, Port Replicator Interface |
| Quick Launch Panel | Four Programmable Application Launch Buttons (Internet, Email and two other softwares) |
| Security ⁸ | BIOS Lock, 2-password Hard Disk Lock, LifeBook Lock, Anti-theft Lock Slot, Smartcard ¹ Slot, Fingerprint Sensor, Trusted Platform Module (TPM v1.2) option |
| Dimensions | 357mm (W) x 257mm (D) x 33.3/ 34.5mm (H) |
| Bundled Accessories | |
| AC Adapter | Input AC 100-240V, Output DC 19V 100W |
| Bundled Software | Softex Omnipass, CyberLink PowerDVD™, CyberLink PowerDirector™, Roxio Easy Media Creator, Adobe Acrobat Reader, Fujitsu UpdateNavi ¹⁶ , Fujitsu 3D Shock Sensor Utility, Fujitsu Power Saving Utility, Fujitsu Hardware Diagnostic Tool, Fujitsu Display Manager, Sun Microsystems Java Runtime, Camera Capture Application, Microsoft Office Professional 2007 60-day Convertible Trial ¹⁸ |
| Other Software | 1 year Full Licensed Norman Virus Control with Sandbox Technology and Norman Personal Firewall, Acronis True Image |
| Optional Accessories | |
| Port Replicator | Connector Interface: USB 2.0 x 4, Headphone-out, Microphone-in, DVI-D, VGA (external display), RJ45 (LAN), PS/2 (keyboard/mouse), Serial, Parallel, Power Adapter DC-in |
| Modular Bay Options | Replaceable with - Bay Battery, 6-cell Li-Ion 3800mAh, up to 5.5hrs ¹ battery life (Standard + Bay Batteries) - Dual Layer DVD Super Multi Writer ⁷ - 2 nd HDD Fitting Kit (w/o SATA HDD) ¹¹ - DVD/CD-RW Combo Drive - Weight Saver |
| Floppy Disk Drive | External USB 1.44MB FDD |
| Mouse | USB Optical Scroll Mouse |

The above information shows the general technical specifications of the product and does not represent actual configuration. For specific configurations and their availability, please check with your local distributors.




- Disclaimers:
- 1 Results obtained from BAFCO® MobileMark® 2007 (Productivity Workload) performed on systems with maximum battery life settings under laboratory testing environment. Actual battery life will vary based on screen brightness, sound volume settings, running applications, connected peripherals, power management settings, battery conditioning, and other customer preferences in the real life situation. Built-in bay device or hard drive usage may also have a significant impact on battery life. Note: Battery life is based on Intel® Core™2 Processor T9400.
 - 2 Maximum 56Kbps performance varies according to your local service providers' services as well as line condition. V.92 performance is dependent on local service providers' services.
 - 3 This term does not represent actual data rate of 4Mbps and simply indicates compliance with IEEE 802.3 standard specification 1.1. Actual maximum data rate depends on local configurations and connected devices.
 - 4 This term does not represent actual data rate of 1000/100/10Mbps and simply indicates compliance with IEEE 802.3, IEEE 802.3u and IEEE 802.3ab standards. Actual maximum data rate depends on network configurations, cable conditions as well as connected devices.
 - 5 Please check actual bundling with country local distributor. T9400 refers to (2.53GHz, 6MB L2 cache, 1066MHz FSB). P8600 refers to (2.4GHz, 3MB L2 cache, 1066MHz FSB).
 - 6 1023MB Total Available Graphics Memory is available on 2GB system memory. It refers to a total of 256MB dedicated video memory and 767MB shared system memory. 511MB Total Available Graphics Memory is available on 1GB system memory. It refers to a total of 256MB dedicated video memory and 255MB shared system memory. The memory size available to the Operating System will be less than the total size of the installed memory modules.
 - 7 Fujitsu does not provide the application for Smartcard solution.
 - 8 BIOS Lock needs a supervisor/user password to access BIOS setup. BIOS settings can be configured to prompt for password at every first bootup or all bootup sequences. Access to BIOS setup is needed to configure Hard Disk Lock. Hard Disk Lock requires an access key to retrieve data on the hard disk. This is a Data Confidentiality security feature. LifeBook Lock requires a supervisor/user password to bootup the LifeBook when it powers up or resumes last session from suspend/hibernate mode. This is an anti-theft feature with more than 800,000 password combinations using the buttons on the Quick Launch Panel. Anti-theft Lock Slot allows the use of a lock to physically secure the LifeBook. Smartcard slot usage is dependent on customer's solution. Fingerprint sensor uses AuthenTec TruePrint™ Technology and Softex OmniPass to remember customer list of user IDs and passwords. Full security unlock sequence - LifeBook Lock, Bootup Lock (BIOS Lock), Hard Disk Lock, Fingerprint Windows Logon.
NOTE: Loss of password requires the LifeBook to be returned to Japan factory for system refresh. Cost of shipment and lost data will be borne by the customer. Backup your user's profile before changing HDD. Without the user's profile associated with a document at the point of encryption, Softex OmniPass cannot decrypt the encrypted document. 2 passwords refers to Master Password and User Password of the HDD Lock. The Master Password can be used to clear the User Password at the BIOS Security. If HDD Lock is enabled, only the User Password can be used to boot up the unit. Loss of these 2 passwords means the HDD content cannot be retrieved. It is the customer's responsibility to ensure the safe keeping of these 2 passwords for retrieval of data from the locked HDD.
 - 9 Supports DVD multi formats such as DVD-RAM, DL DVD±R, DVD±RW, DVD±R, CD-RW, DVD-ROM, CD-R and CD-ROM.
 - 10 RoHS (Restriction on Hazardous Substances) compliance means the system and its internal components comply with the EU RoHS directive (2002/95/EC) on the restricted use of six hazardous substances in the manufacture of the system and its internal components.
 - 11 Only the HDD Housing Kit and screws are provided. HDD is to be purchased separately.
 - 12 Spill-resistant Keyboard does not imply the system is water-proof. If liquid is spilled onto the keyboard, power off the system immediately and turn the notebook upside down to drain off the liquid.
 - 13 This refers to Windows Vista® hard disk drives C:\ and D:\. 50/50 refer to approximate 50% allocation of user accessible hard disk storage to C:\ and D:\ drives.
 - 14 4GB DDR3 1066MHz maximum memory is supported when Fujitsu recommended 2GB DDR3 1066MHz memory module is made available.
 - 15 Fujitsu 3D Shock Sensor of a powered-up unit retracts hard disk read/write head to a secured zone upon detection of excessive vibrations or shocks. This greatly reduces the possibility of damage to the hard disk and its content - example in the event of a sudden drop or impact. The sensor monitors movement from three axes and its sensitivity can be adjusted by user to accommodate different working environments using the Fujitsu 3D Shock Sensor Utility.
 - 16 UpdateNavi is a Fujitsu Proprietary application that updates LifeBook drivers by connecting automatically to Fujitsu's server. This will help update your LifeBook with the latest software drivers and utilities to ensure compatibility between hardware and software, maintaining smooth operation anytime, anywhere.
 - 17 It is natural for all thin-film transistor (TFT) liquid crystal displays (LCD) to show a small number of missing or discolored dots. These are commonly known as non-conforming pixels. This is a technology limitation of TFT LCD and does not represent a defect. Fujitsu warranty does not cover limitations in technology such as non-conforming pixels.
 - 18 Microsoft Office Professional 2007 60-day Convertible Trial needs online activation to begin. 60-day starts from day of activation.

*PCI Express® and the PCI Express design marks are registered trademarks and/or service marks of PCI-SIG. Dolby and the double-D symbol are registered trademarks of Dolby Laboratories.

Specifications reflected above are engineering and hardware specifications. They do not represent actual usage or operating dimensions, sizes, performances and weights as these are dependent on factors such as operating temperature, type of operating system and application used, connected devices and accessories as well as hardware configurations of the notebook. Please check the compatibility of 3rd party accessories before purchase. Ambient temperature: 5° to 35°C / 41 to 95°F (operating), -15° to 60°C / 5 to 140°F (non-operating). Relative humidity: 20% to 85% RH (operating), 5% to 85% RH (non-operating)


- Built-in Wireless LAN**
Check your e-mails and surf the internet at wireless LAN hotspots. Easily turn it off with the Wireless LAN switch.
- Dual Built-in Stereo Microphones**
Ease your communication with your loved ones using VoIP.
- Built-in 1.3 Mega Pixel Camera**
Take pictures, create videos and chat with others in astounding clarity.
- USB 2.0 Connectors**
Download MP3 music to your MP3 player.
- LifeBook Security/ Application Panel**
Programmable panel protects against unauthorised entry and offers easy one-touch access to applications.
- Status Indicator LCD**
This indicator displays operating status symbols that correspond to specific components of your notebook.
- High Definition Audio Connectors**
Experience high quality music and recording with the latest audio codec.
- IEEE1394 Connector**
Download movies and photos from video camera and digital camera to your LifeBook.
- Quick Point***
Allows you to navigate the cursor easily while typing.
* For model with Quick Point.
- PC Card/ ExpressCard™ Slots**
Plug and play a high-data bandwidth multimedia accessory. TV tuner card for pure enjoyment.
*TV Tuner card is not provided.
- Dedicated Smartcard Slot**
Plug in your Smartcard for information encryption and be assured of ultimate security while on the go.
- Wireless LAN/ Bluetooth® ON/OFF Switch**
The switch allows you to turn on and off the Wireless LAN/ Bluetooth® communications.
* For model with Bluetooth®.
- SD/ MS/ MS PRO Card Slot**
Exchange information on your LifeBook with your PDA and mobile phones. Download pictures from your digital camera to your LifeBook. Memory cards are not provided.
- Spill-resistant Keyboard**
Protects your LifeBook from accidental liquid spills.
- Modular Bay Device**
Plug and play additional bay option e.g. bay battery.
- Speakers**
The built-in dual speakers provide stereo sound.
- Fingerprint Sensor**
Instant access to encrypted files and folders as well as password enabled websites and online applications.

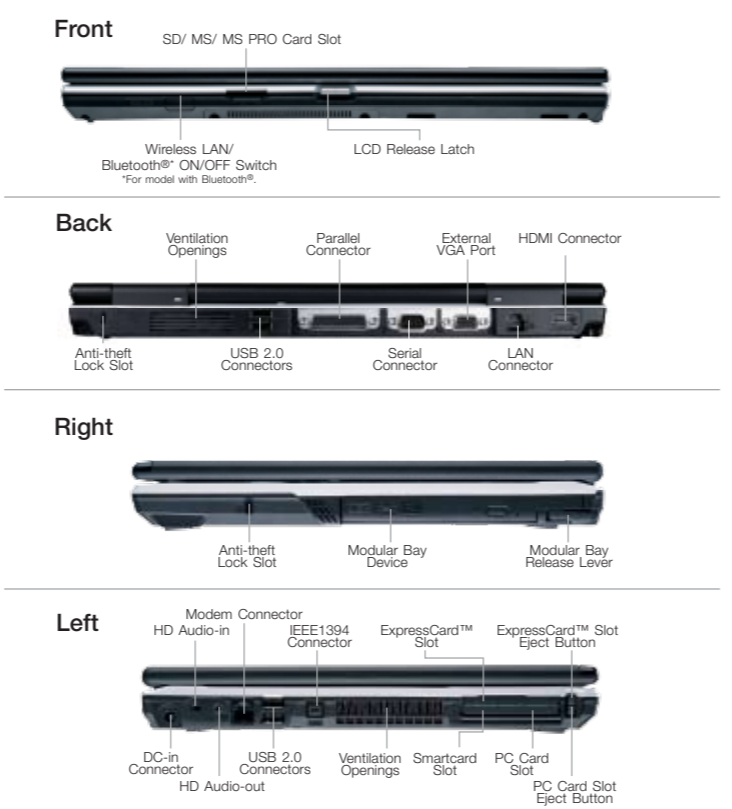

LifeBook E8420




Optional Accessories



Dual Layer DVD Super Multi Writer



Modular Bay Battery



Weight Saver



Battery



Optical USB Black Mouse (Retractable)



Port Replicator

Unique wedge design provides easy, one-step connection and removal of your LifeBook. When connected, it links all your peripherals to your LifeBook.

All rights to the mentioned trademarks reside with their respective owners. Fujitsu endeavours to ensure that the information in this documentation is correct and fairly stated, but does not accept liability for any errors or omissions. The development of Fujitsu products and services is continuous and published information may not be up to date. It is important to check the current position with Fujitsu. The document is not part of the contract or licence save in so far as may be expressly agreed.

Dealer:

HONG KONG (Head Office):
Fujitsu PC
Asia Pacific Ltd
Tel : (852) 3101 8133
Fax : (852) 3101 0633
hk.fujitsu.com/pc

AUSTRALIA & NEW ZEALAND:
Fujitsu PC Australia
Toll Free: (AU) 1 800 288 283
(NZ) 0800 288 283
Fax : (61-2) 9889 3360
au.fujitsu.com/pc

CHINA:
Fujitsu PC China Division
Tel : (86-21) 3310 9888
Fax : (86-21) 3310 0606
cn.fujitsu.com/pc

INDIA:
Fujitsu India Limited
Tel : (91) 124 470 5100
Fax : (91) 124 470 5199
in.fujitsu.com/pc

INDONESIA:
Fujitsu Indonesia
Tel : (62-21) 570 9330
Fax : (62-21) 573 5150
id.fujitsu.com/pc

MALAYSIA:
Fujitsu PC Asia Pacific Pte Ltd
Tel : (60-3) 7728 4868
Fax : (60-3) 7728 4830
my.fujitsu.com/pc

PHILIPPINES:
Fujitsu Philippines Inc.
Tel : (63-2) 812 4001
Fax : (63-2) 817 7576
ph.fujitsu.com/pc

SINGAPORE:
Fujitsu PC Asia Pacific Pte Ltd
Tel : (65) 6776 0688
Fax : (65) 6776 0788
sg.fujitsu.com/pc

TAIWAN:
Fujitsu Taiwan Ltd
Tel : (886-2) 2311 2255
Fax : (886-2) 2311 2277
tw.fujitsu.com/pc

THAILAND:
Fujitsu Systems Business (Thailand) Ltd PC Division
Tel : (66-2) 263 7888
Fax : (66-2) 263 7880
th.fujitsu.com/pc


VIETNAM:
Fujitsu Vietnam Ltd
Tel : (84-4) 831 3895
Fax : (84-4) 831 3898
vn.fujitsu.com/pc

Note: For countries not listed above, please contact our Hong Kong office.

Fujitsu recommends Windows Vista® Business.




Optional Accessories



Dual Layer DVD Super Multi Writer

Dual-layer DVD-R technology lets you record almost twice the amount of the data on a single disc surface. Compatible with CD-R, CD-RW, DVD-R, DVD-RW and DVD-RAM.



Modular Bay Battery

Searching for power sources when you're outdoors can be a hassle. Extend the operating hours of your LifeBook with a modular battery pack.



Weight Saver

Reduces the weight of your LifeBook whenever the optical drive is not required.



Battery

Double the operating hours of your LifeBook with a second battery pack.



Optical USB Black Mouse (Retractable)

Optical tracking technology offers convenient usage.



Port Replicator

Unique wedge design provides easy, one-step connection and removal of your LifeBook. When connected, it links all your peripherals to your LifeBook.

HONG KONG (Head Office):
Fujitsu PC
Asia Pacific Ltd
Tel : (852) 3101 8133
Fax : (852) 3101 0633
hk.fujitsu.com/pc

AUSTRALIA & NEW ZEALAND:
Fujitsu PC Australia
Toll Free: (AU) 1800 288 283
(NZ) 0800 288 283
Fax : (61-2) 9889 3360
au.fujitsu.com/pc

CHINA:
Fujitsu PC China Division
Tel : (86-21) 3310 9888
Fax : (86-21) 3310 0606
cn.fujitsu.com/pc

INDIA:
Fujitsu India Limited
Tel : (91) 124 470 5100
Fax : (91) 124 470 5199
in.fujitsu.com/pc

INDONESIA:
Fujitsu Indonesia
Tel : (62-21) 570 9330
Fax : (62-21) 573 5150
id.fujitsu.com/pc

MALAYSIA:
Fujitsu PC Asia
Pacific Pte Ltd
Tel : (60-3) 7728 4868
Fax : (60-3) 7728 4830
my.fujitsu.com/pc

PHILIPPINES:
Fujitsu Philippines Inc.
Tel : (63-2) 812 4001
Fax : (63-2) 817 7576
ph.fujitsu.com/pc

SINGAPORE:
Fujitsu PC Asia
Pacific Pte Ltd
Tel : (65) 6776 0688
Fax : (65) 6776 0788
sg.fujitsu.com/pc

TAIWAN:
Fujitsu Taiwan Ltd
Tel : (886-2) 2311 2255
Fax : (886-2) 2311 2277
tw.fujitsu.com/pc

THAILAND:
Fujitsu Systems
Business (Thailand) Ltd
PC Division
Tel : (66-2) 263 7888
Fax : (66-2) 263 7880
th.fujitsu.com/pc

VIETNAM:
Fujitsu Vietnam Ltd
Tel : (84-4) 831 3895
Fax : (84-4) 831 3898
vn.fujitsu.com/pc

Note: For countries not listed above, please contact our Hong Kong office.

All rights to the mentioned trademarks reside with their respective owners. Fujitsu endeavours to ensure that the information in this documentation is correct and fairly stated, but does not accept liability for any errors or omissions. The development of Fujitsu products and services is continuous and published information may not be up to date. It is important to check the current position with Fujitsu. The document is not part of the contract or licence save in so far as may be expressly agreed.

JOB NO.: 2044 • Printed by Fujitsu PC Asia Pacific Limited in July 2008. Information is correct at time of printing.

Dealer:

LifeBook E8420
top-of-the-line performer
state-of-the-art technology




LIFEBOOK | Built-In Confidence

Fujitsu recommends Windows Vista® Business.




Optional Accessories



Dual Layer DVD Super Multi Writer

Dual-layer DVD-R technology lets you record almost twice the amount of the data on a single disc surface. Compatible with CD-R, CD-RW, DVD-R, DVD-RW and DVD-RAM.



Modular Bay Battery

Searching for power sources when you're outdoors can be a hassle. Extend the operating hours of your LifeBook with a modular battery pack.



Weight Saver

Reduces the weight of your LifeBook whenever the optical drive is not required.



Battery

Double the operating hours of your LifeBook with a second battery pack.



Optical USB Black Mouse (Retractable)

Optical tracking technology offers convenient usage.



Port Replicator

Unique wedge design provides easy, one-step connection and removal of your LifeBook. When connected, it links all your peripherals to your LifeBook.

HONG KONG (Head Office):
Fujitsu PC
Asia Pacific Ltd
Tel : (852) 3101 8133
Fax : (852) 3101 0633
hk.fujitsu.com/pc

AUSTRALIA & NEW ZEALAND:
Fujitsu PC Australia
Toll Free: (AU) 1800 288 283
(NZ) 0800 288 283
Fax : (61-2) 9889 3360
au.fujitsu.com/pc

CHINA:
Fujitsu PC China Division
Tel : (86-21) 3310 9888
Fax : (86-21) 3310 0606
cn.fujitsu.com/pc

INDIA:
Fujitsu India Limited
Tel : (91) 124 470 5100
Fax : (91) 124 470 5199
in.fujitsu.com/pc

INDONESIA:
Fujitsu Indonesia
Tel : (62-21) 570 9330
Fax : (62-21) 573 5150
id.fujitsu.com/pc

MALAYSIA:
Fujitsu PC Asia
Pacific Pte Ltd
Tel : (60-3) 7728 4868
Fax : (60-3) 7728 4830
my.fujitsu.com/pc

PHILIPPINES:
Fujitsu Philippines Inc.
Tel : (63-2) 812 4001
Fax : (63-2) 817 7576
ph.fujitsu.com/pc

SINGAPORE:
Fujitsu PC Asia
Pacific Pte Ltd
Tel : (65) 6776 0688
Fax : (65) 6776 0788
sg.fujitsu.com/pc

TAIWAN:
Fujitsu Taiwan Ltd
Tel : (886-2) 2311 2255
Fax : (886-2) 2311 2277
tw.fujitsu.com/pc

THAILAND:
Fujitsu Systems
Business (Thailand) Ltd
PC Division
Tel : (66-2) 263 7888
Fax : (66-2) 263 7880
th.fujitsu.com/pc

VIETNAM:
Fujitsu Vietnam Ltd
Tel : (84-4) 831 3895
Fax : (84-4) 831 3898
vn.fujitsu.com/pc

Note: For countries not listed above, please contact our Hong Kong office.

All rights to the mentioned trademarks reside with their respective owners. Fujitsu endeavours to ensure that the information in this documentation is correct and fairly stated, but does not accept liability for any errors or omissions. The development of Fujitsu products and services is continuous and published information may not be up to date. It is important to check the current position with Fujitsu. The document is not part of the contract or licence save in so far as may be expressly agreed.

JOB NO.: 2044 • Printed by Fujitsu PC Asia Pacific Limited in July 2008. Information is correct at time of printing.

Dealer:

LifeBook E8420
top-of-the-line performer
state-of-the-art technology



Absolute performance is at your disposal with the latest Intel® Centrino® 2 Processor Technology. The corporate warrior's first choice in weaponry, the LifeBook E8420 grants you the power to perform with advanced features and enhanced security. This brilliant 15.4-inch SuperFine Wide XGA screen displays crystal clear images with astounding detail. Supported by NVIDIA GeForce 9300M GS with a maximum of 4GB memory, the LifeBook E8420 means serious business.

Performance on Command
for Corporate Warriors



High Performance
For High Achievers

Power your business with the advanced Intel® Centrino® 2 Processor Technology at full speed ahead. Featuring the Intel® PM45 Express Chipset and Intel® WiFi Link 5300AGN (3x3) network connection, get power and speed on demand, see greater productivity and improved support for network areas plus protect it by actively blocking incoming threats.



Maximum Security

A bristling arsenal of security features work for your peace of mind with Fujitsu 3D Shock sensor, BIOS Lock, 2-password Hard Disk Lock, LifeBook Lock, Trusted Platform Module option and Anti-theft Lock Slot. With the LifeBook E8420, professionals can rest assured that their confidential data stays confidential, and away from prying eyes. To top it off, access to encrypted data will only be authorised with a match to a pre-registered fingerprint.

LIFEBOOK | Built-In Confidence